Quick Start Guide

AgaMatrix WaveSense JAZZ™ Wireless
Blood Glucose Monitoring System

AgaMatrix®

Customer Care:
0800 093 1812 (UK) | 1800 817 315 (ROI)
In case of emergency, contact your healthcare
professional or emergency medical response.

5.6 mmol/L

AUTOMATICALLY SYNCS TO APP VIA
Bluetooth® wireless technology
Reference steps on the reverse side to pair and sync.

Replacement Batteries are Included!
Two replacement CR2032, 3-volt, lithium batteries are
included in your meter's carrying case. Reference the
battery replacement instructions on the reverse side.

About the System

The AgaMatrix WaveSense JAZZ
Wireless Blood Glucose Monitoring
System allows you to check your
glucose levels with capillary whole
blood. For complete instructions,
see your AgaMatrix WaveSense
JAZZ Wireless Owner's Guide.

*WARNING: The AgaMatrix Lancing
Device MUST be used ONLY to
obtain a blood sample by a single
person for self-testing. Do not use
any lancet or lancing device that
has been used by another person.*

Blood Glucose Meter

1) Display Area
2) Test Strip Port
3) Meter Button: Press to
turn on the meter and view
past glucose test results.

Test Strip

1) Contact Bars:
insert this end into
the test strip port
2) Visual Fill Window:
completely fills when
enough sample is
applied
3) Sample Area: blood
or control solution
applied here

Lancing System

1) Cocking Handle
2) Depth Selector
3) Depth
4) Release Button
5) Lancet Ejector
6) Lancing Device Body
7) Lancet Holder
8) Lancing Device Cap
9) Alternate Site Testing
Cap (Clear)
10) Lancet
11) Lancet Cover

Note: You should pair your meter to the AgaMatrix Diabetes Manager App (the App) to set the meter's time and date before testing. This will ensure that results from meter are sent wirelessly to the App. Please see the reverse side of this Quick Start Guide or see your Owner's Guide for further details.

Blood Glucose Testing Steps
(For complete instructions, see your AgaMatrix WaveSense JAZZ Wireless Owner's Guide)

1 Insert the test strip into the meter:

Insert the test strip, with the
contact bars facing up, into the
test strip port. The meter will
automatically be activated.

*CAUTION: To ensure accurate
results, wash your hands with
warm, soapy water, rinse and
thoroughly dry before every test.*

2 Lance the test site:

Reference the instructions
for how to prepare the
lancing device, on the right.

Press the lancing device
against the site to be
lanced and press the
release button.

— Release Button

3 Obtain a drop of blood:

Squeeze from the base of
your finger up towards
the tip, milking your
finger, until a small blood
drop forms.

Do not squeeze directly
around the lanced area.

4 Bring the test strip to the blood sample:

The meter displays the apply sample
to test strip animation, indicating it is
now ready for you to apply blood.

The test strip draws
the blood into the
test strip.

5 Remove test strip from the blood sample when the visual fill window completely turns red and the meter beeps:

((BEEP))

*The entire visual fill
window will turn red.*

The calculation animation
1-2-3 indicates that the meter
is calculating your result.

6 View test result and final steps:

Following the calculation
animation, the test result will
appear on the meter display.
The test result is stored in
the meter's memory.

5.6 mmol/L

Remove the used test strip
from the meter. The meter
will automatically turn off.

Snap off the lancing device
cap and replace lancet cover.
Remove the used lancet.

Discard the used test strip
and lancet properly. Follow
your healthcare professional's
instructions for disposal.

Prepare the Lancing System

1 Twist off the cap from
the lancing device.

2 Insert a new lancet
firmly into the lancet
holder. Press the
release button to
expose more of the
lancet.

3 Hold the lancet and
twist the cover off.

4 Replace lancing
device cap.

5 Set the skin
penetration depth.

+ *Depth Level* —

6 Pull the cocking handle
out until it clicks.

Quick Start Guide

AgaMatrix WaveSense JAZZ™ Wireless Blood Glucose Monitoring System

5.6 mmol L

AUTOMATICALLY SYNCS TO APP VIA Bluetooth® wireless technology

Note: You should sync your meter to the AgaMatrix Diabetes Manager App (the App) to set the meter's time and date before testing. This will ensure that results from meter are sent wirelessly to the App.

PAIRING & SYNCING INSTRUCTIONS

The AgaMatrix Diabetes Manager App works on a variety of iOS and Android™ devices visit www.agamatrix.co.uk for an updated list.

Pairing and Syncing Your Meter With the App

Use the AgaMatrix WaveSense JAZZ Wireless Meter with the AgaMatrix Diabetes Manager App (the App) to sync glucose results directly to your iOS or Android device.

You should pair your meter to the App to set your meter's time and date before performing your first test. Test results without a set time and date will be displayed on your meter with "--:--" and "--/--" in place of the time and date.

1 Download and open the App:

Download the AgaMatrix Diabetes Manager App from the App Store® (for Apple devices) or from Google Play™ (for Android devices).

Tap on the App icon on your supported device.

Download on the App Store

GET IT ON Google Play

2 Navigate to the menu icon:

Tap on the icon made of three lines.

Today 6/11

3 Add a new meter:

Tap on "**Meters**." Tap "**Add a new meter**."

On your meter, press and hold the Meter Button. Select your meter when it appears in the app.

4 Enter the passkey:

A 6-digit passkey will appear on the meter. Type the passkey number into the App.
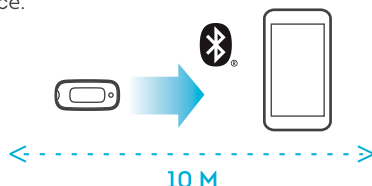
Example of a passkey:

354270

5 Confirm pairing is successful:

Both the meter and the App will indicate that pairing was successful. The meter will have a tick mark and the App will show a message.

Example of tick mark:

6 Sync data:

After your meter is paired with your device, it will "sync", or transfer data, every time it is within close proximity of your paired device.

10 M

Note: The meter and App must be within 10 metres of each other in order to pair and transfer data.

BATTERY REPLACEMENT INSTRUCTIONS

IMPORTANT: Only use CR2032 or DL2032 batteries with the AgaMatrix WaveSense JAZZ Wireless Meter.

Battery Display Messages

Low Battery Message: *(This message appears for 2 seconds)* You can still perform a test when you see a low battery message, but batteries should be replaced as soon as possible. Use only CR2032 or DL2032 batteries.

Dead Battery Message: The batteries in your meter do not have enough power to activate your meter and perform a test; batteries must be replaced.

Replacing the Batteries *(For more details, see your AgaMatrix WaveSense JAZZ Wireless Owner's Guide)*

IMPORTANT: When the batteries are replaced, the time and date will be erased from your meter. You must sync your meter with your supported device to ensure your readings have time and date. To sync your meter, reference the instructions on the right.

*Note: Removing the batteries does not affect stored glucose records.*

1 Open the battery door:

Make sure the meter is off. Turn the meter so you are looking at the battery door. Slide the battery door off the meter.

2 Remove the used batteries:

Remove the used batteries with a non metallic tool.

Used Batteries

3 Install the new batteries:

Two replacement batteries are included in the pocket of your meter's carrying case. Locate the replacement batteries.

Install the new batteries with the positive (+) sign facing up towards you.

New Batteries

4 Close the battery door:

Slide the battery door onto the meter. Make sure that the battery door is completely closed before using the meter.

Please dispose of used batteries according to your local environmental regulations.